

Buttersize

BETTER PARTICLE SIZE SOLUTIONS

Buttersizer ST

Your One-Stop QC Tool

PARTICLE SIZE



Your One-Stop QC Tool

The Bettersizer ST is an automated laser diffraction particle size analyzer designed for industrial quality control. Its patented DLOS (Dual Lens Optical System) guarantees the instrument to provide **consistent and reliable** particle size distribution results. The SOP (Standard Operating Procedure) and automated analysis procedures are designed to help you save valuable time for quality inspection.

Skip complex operations with [Bettersizer ST](#): Simply click "Start", add the sample, and Bettersizer ST will provide the particle size distribution analysis for you.

INDUSTRY



BETTERSIZER ST FEATURES AT A GLANCE

Excellent Accuracy

Outstanding Repeatability



Legendary Ease-of-Use

Cost-Efficiency & Robustness


"Measurement consistency allows us to verify the outcome of the process without worrying about measurement errors. The system performance and reliability are excellent in manufacturing CaCO_3 . Auto-cleaning between samples is also made easy by Bettersizer ST. It has a very simple and intuitive user interface. Tests can be conducted by multiple production personnel due to its ease of use."

Sadia Munawer

QC Manager of Shaheen Grinding Mills (Pvt) Ltd.

INNOVATIVE DLOS TECHNOLOGY

The DLOS (Dual Lens Optical System) is a patented optical system designed by Bettersize Instruments. In DLOS, one single laser source and two large Fourier lenses are utilized, and the combination of wide-angle forward, lateral and backward photodetectors allows consistent and accurate results with a measurement range from 0.1 to 1000 μm .

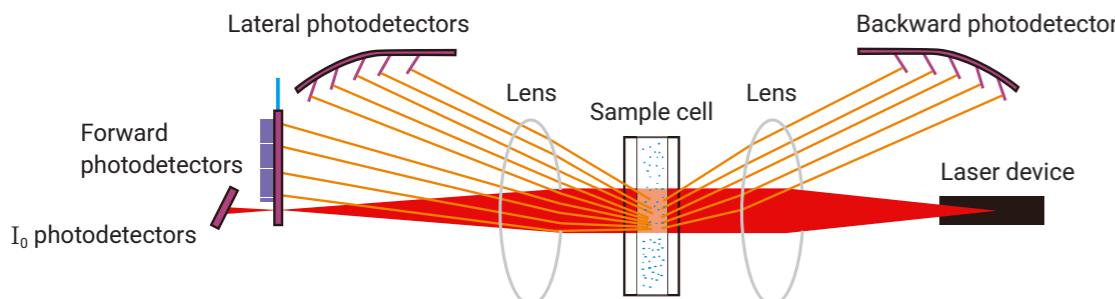

Features

- High resolution and accuracy ensured by two large Fourier lenses
- Expands measurement range with 86 high-speed photodetectors
- Compact design prevents using folding optics
- Continuous incident light with consistent wavelength provided by one single laser source


Advantages

- **Measurement range: 0.1 – 1000 μm**
- **Avoid misalignment**
The compact design of DLOS removes folding optics that are susceptible to misalignment
- **More reliable results**
Only one laser source is utilized to provide a continuous scattering spectrum with consistent wavelength
- **Cost-efficient**
Reliable results without a second laser source leads to cost efficiency




EXCELLENT ACCURACY

Accuracy Verification of Standards

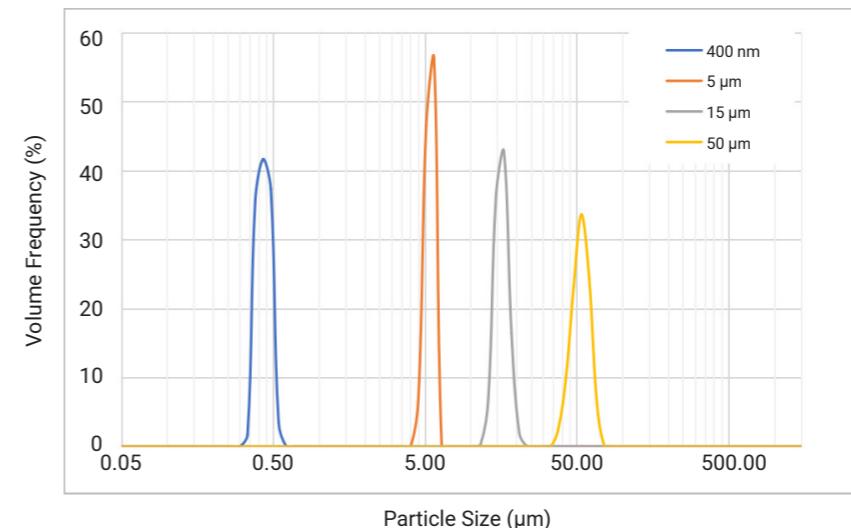

Duke standard samples were measured separately by the Bettersizer ST, showing the distribution peak in the correct position and narrow distribution with high accuracy.

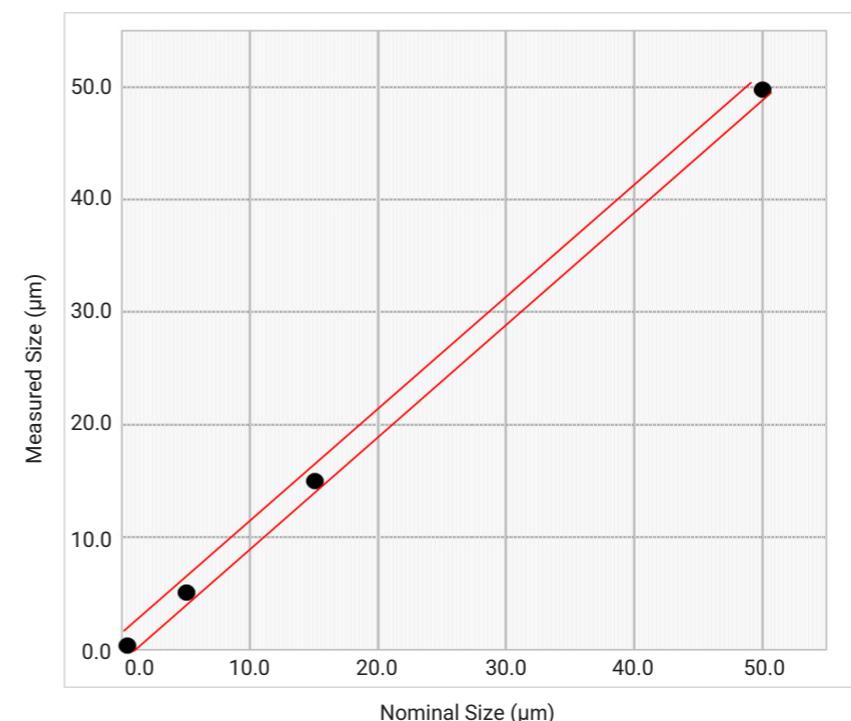

The red line is the nominal size range of standards $\pm 1.0\%$, and the black dots are the measured sizes. As shown in the figure, the measurement accuracy of Bettersizer ST for standards is within 1%.

"The operation and measurement procedure of Bettersizer ST is convenient and easy-to-follow, it helps us build an accuracy benchmark of the measurement result, which has revolutionized the quality of our products."

Liaoning Meishuo Mineral Products Co. Ltd

OUTSTANDING REPEATABILITY

Exceptional repeatability provided by Bettersizer ST ensures the reliability of the results. Rapid measurements with **consistent and reliable** results can ease your workload on quality control.

Excellent Repeatability From:


- Stability of signal transmission systems
- Efficient dispersion system
- Automatic alignment keeps the instrument always in optimum condition
- Signal acquiring rate up to 3500 times/second



Repeatability Tests


The outstanding repeatability of Bettersizer ST, demonstrated by the following two consecutive tests.

Aluminum Oxide

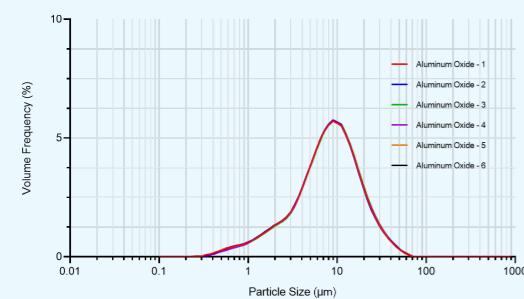

Sample Name	D05 (μm)	D10 (μm)	D50 (μm)	D90 (μm)	D95 (μm)
Aluminum Oxide - 1	1.337	2.211	8.693	22.30	29.10
Aluminum Oxide - 2	1.352	2.212	8.655	22.24	29.27
Aluminum Oxide - 3	1.364	2.260	8.789	22.59	29.50
Aluminum Oxide - 4	1.444	2.309	8.809	22.69	29.66
Aluminum Oxide - 5	1.360	2.233	8.744	22.42	29.39
Aluminum Oxide - 6	1.388	2.251	8.738	22.35	29.31
RSD	2.77%	1.63%	0.66%	0.78%	0.66%

Titanium Dioxide

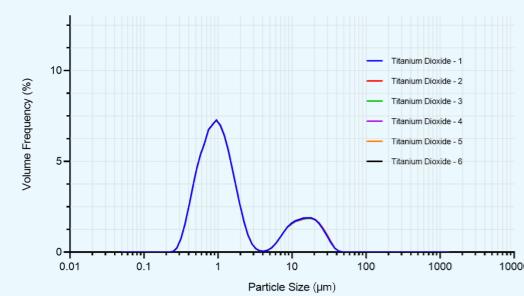

Sample Name	D05 (μm)	D10 (μm)	D50 (μm)	D90 (μm)	D95 (μm)
Titanium Dioxide - 1	0.454	0.534	1.158	16.08	22.36
Titanium Dioxide - 2	0.454	0.534	1.158	16.23	22.65
Titanium Dioxide - 3	0.453	0.534	1.158	16.20	22.68
Titanium Dioxide - 4	0.454	0.534	1.158	16.28	22.72
Titanium Dioxide - 5	0.452	0.532	1.157	16.31	22.76
Titanium Dioxide - 6	0.454	0.534	1.156	16.22	22.65
RSD	0.18%	0.15%	0.07%	0.49%	0.63%

"The instrument has very good stability. We are now at the stage of new product research and development, most of the samples are in flake structure, and Bettersizer ST helps us measure the particle size differences of different batches, which is helpful for our R&D and product quality control."


EASE YOUR WORKLOAD IN ALL ASPECTS

The Bettersizer software provides various functions that greatly reduce your workload.


I . Intuitive Software

Standard Operating Procedure (SOP)

SOP is an easy solution for standardized and automatic testing. It ensures the measurement results are operator-independent, objective and reliable.

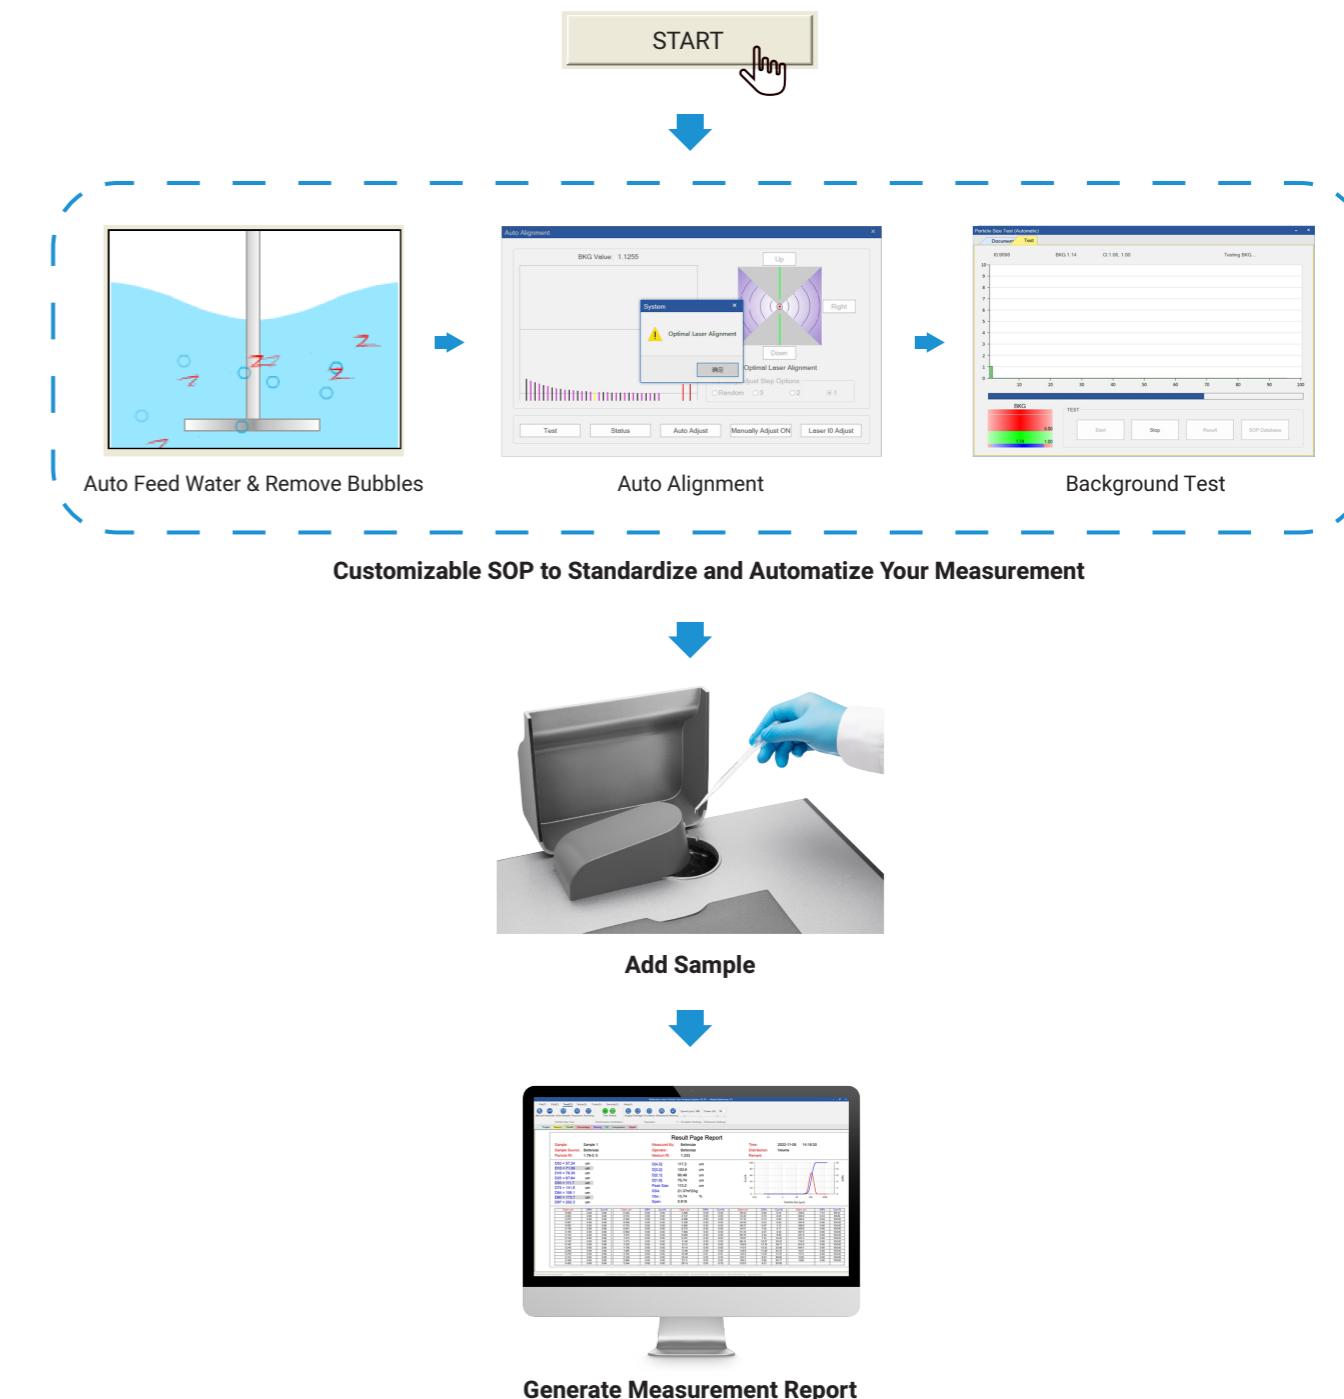

II . Intelligent Data Evaluation for Quality Control

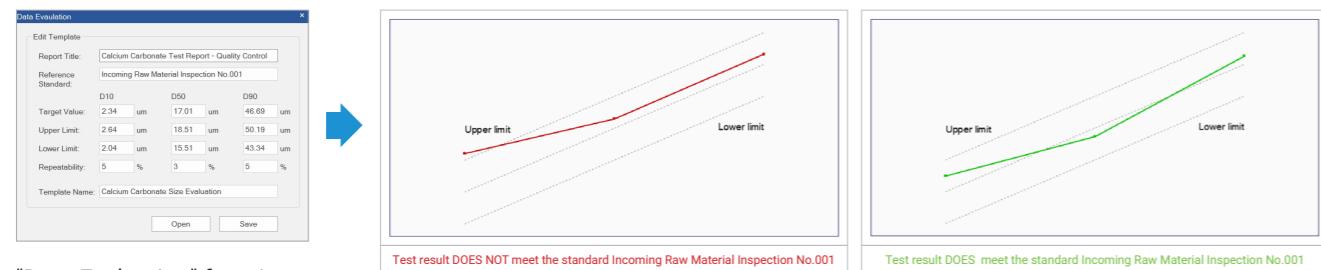


"Data Evaluation" function to customize standards.

"Data Evaluation" report provides a quick snapshot of your sample, so that you can easily determine if your sample meets your QC requirement and identify where it's disqualified.


III . Performance Validation

With the independent Performance Validation function, the software can automatically generate reports that complies with ISO 13320 and pharmacopoeias.

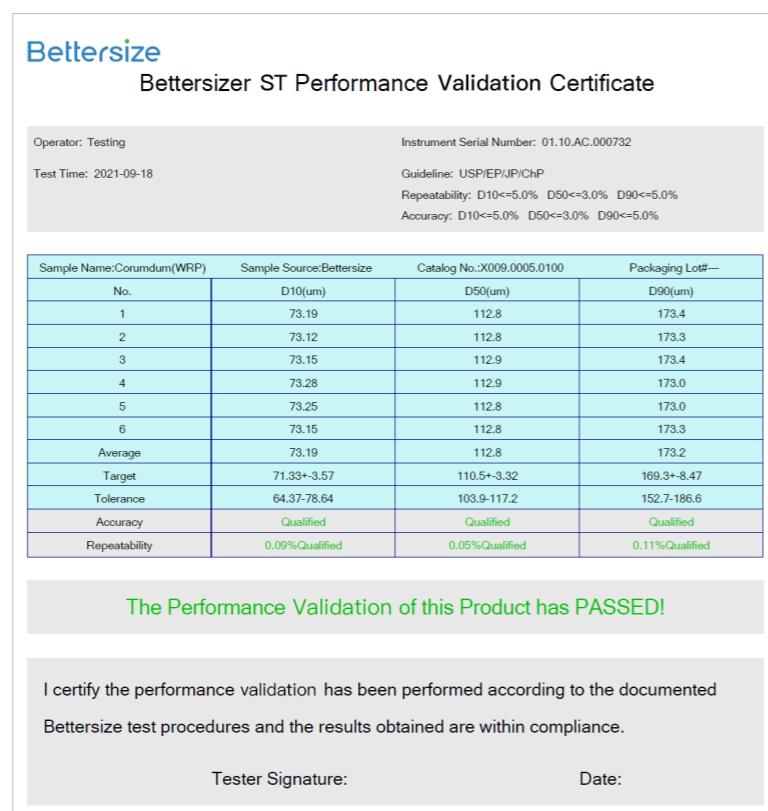

IV . System Inspection

Diagnostic scan: System inspection checklist.

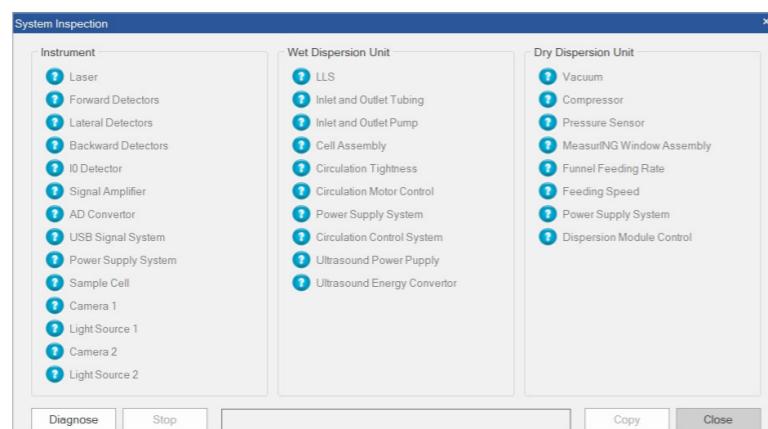

COST-EFFICIENCY & ROBUSTNESS

Outstanding Robustness

- Integrated casting of the bottom plate to protect the instrument
- Accurate measurements can be achieved even after a robustness test
- Long-life fiber semiconductor laser source
- Durable circulation tank with casted stainless steel
- Power-adjustable ultrasonic disperser with dry run protection



Compact Design

- Save valuable workspace for factories and laboratories with an internal wet dispersion system
- The DLOS ensures result accuracy and reliability, while avoiding folding optics that are susceptible to misalignment

Simple Maintenance

- Simple disassembly of sample cells allows a quick cleaning, which can be easily accessed without professional tools and excessive clean formulations
- Auto-cleaning function for the circulation tank eases the maintenance work greatly
- Auto-cleaning process can be easily customized in the software



Low Cost of Ownership

- Entry-level price for a laser particle size analyzer
- A measurement range that covers most applications can be achieved with DLOS without additional cost for a second laser source


"This unit is very straightforward in its uses, has a good software and is simple to operate for various parameters. Bettersizer ST is compact compared to a lot of instruments! Overall, I found this product to be good value for the money."

Arfan Firdaos
QC Supervisor of Clariant Specialty Chemicals Indonesia

APPLICATIONS



With its outstanding accuracy and repeatability, Bettersizer ST is a perfect QC tool for your every application and challenge.

Particle Size Distribution Measured by Bettersizer ST


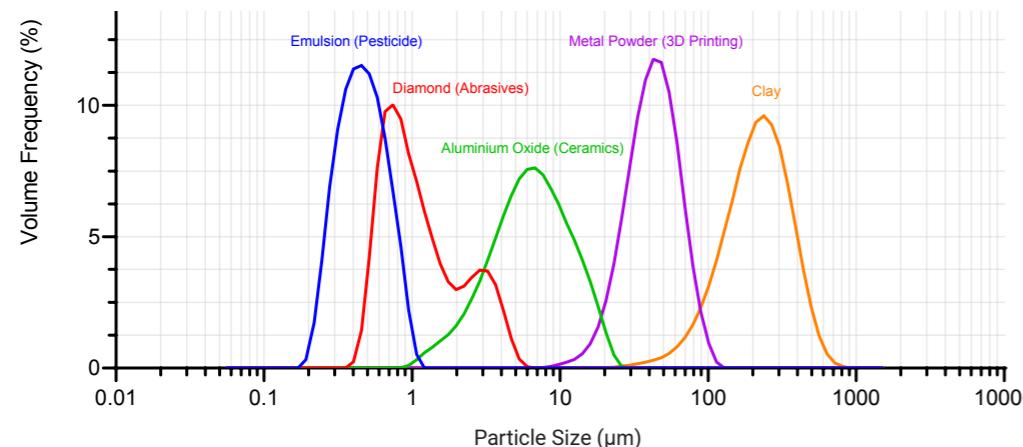


Here are some measurement examples from various industries:



Aluminum Oxide

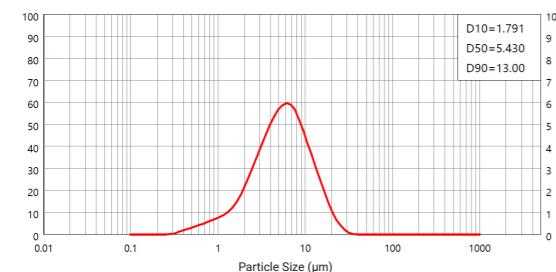



Precipitated Calcium Carbonate

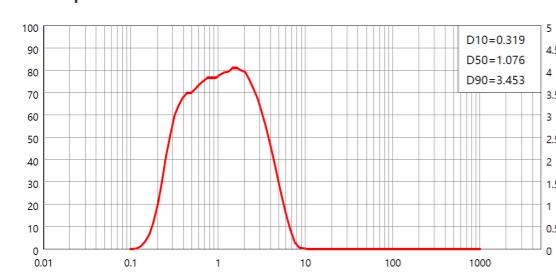

Ground Calcium Carbonate

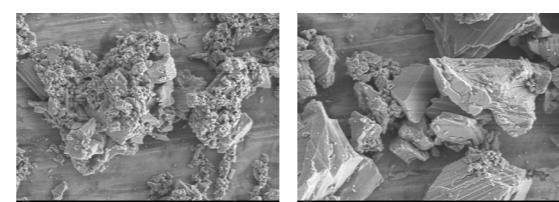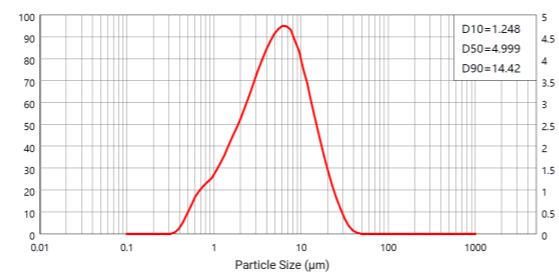

Alloyed Powder

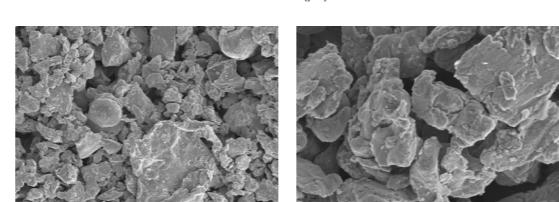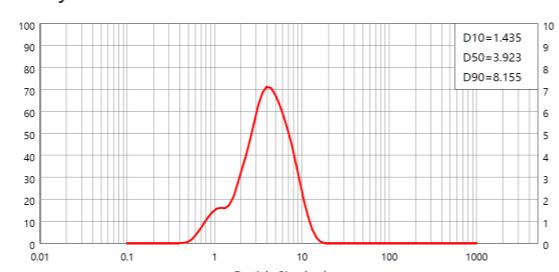

SPECIFICATION

Parameters Measured

Particle size distribution Suspensions, emulsions, dry powders

General

Principle Laser diffraction technology

Analysis Mie scattering theory and Fraunhofer diffraction theory

Typical measurement time Less than 10 seconds

Measurement Performance

Measurement range 0.1 μm - 1000 μm

Accuracy error ≤1% (NIST certified standards)

Repeatability error ≤1% (NIST certified standards)

Number of size classes ≤100 (adjustable)

Feeding mode Automatic wet circulation

Main Device

Optical system Patented DLOS (Dual Lens Optical Systems)

Laser High-power fiber semiconductor laser (10 mW/635 nm)

Detector 86 photodetectors (forward, lateral and backward arrangements)

Measuring angle 0.031 - 159°

Dispersion Module

Circulation speed 300 - 2500 r/min

Circulation flow rate 3,000 - 8,000 mL/min

Ultrasonication Dry run protection, Max 50 W (adjustable)

Circulation tank capacity 600 mL

Software

Conformity 21 CFR Part 11, ISO 13320, CE

Reports Customizable reporting

System Parameters

Dimensions (L x W x H) 660 x 420 x 320 mm

Weight 38 KG

Voltage DC 24V, 221 W

Computer Configuration (Recommended)

Computer interface At least one high-speed USB 2.0 or USB 3.0 port required

Operating system Windows 7 or higher

Hardware specification Intel Core I5, 4GB RAM, 250GB HD

Buttersize

BETTER PARTICLE SIZE SOLUTIONS

Buttersize Instruments Ltd.

No. 9, Ganquan Road, Jinquan Industrial Park,
Dandong, Liaoning, China

Postcode: 118009

Tel: +86-755-26926582



Visit Our Buttersizer ST Site:



Visit Our Official Youtube Channel:

Buttersize Inc.
3185 Airway Ave, Suite C2, Costa Mesa,
CA 92626, United States
Tel: +1 833-699-7493 (SIZE)

Disclaimer: By using or accessing any materials provided by Buttersize Instruments Ltd. in electronic format, you agree to the Disclaimer without any qualification or limitation. While diligent care has been taken to ensure the accuracy of the information contained herein, Buttersize Instruments Ltd. shall not be liable for any errors or damages in connection with the use of these materials. The information is provided as general information, and no representation or warranty, whether express or implied, is made as to its accuracy, completeness, or correctness. It does not constitute part of a legal offer or contract. Buttersize Instruments Ltd. reserves the right to modify, alter, add, and delete the content outlined in these materials without prior notice and without any subsequent liability to the company.

info@buttersize.com
www.buttersizeinstruments.com

Copyright: © 2025 Buttersize Instruments Ltd. | All Rights Reserved
13.0103.00.02